

# A+ P Penthouse Evaporators



## Insulated Panel Construction

- Foamed-in-place polyurethane foam panels
  - Assembled with offset tongue and groove for thermal break
  - Utilizes concealed fasteners to eliminate thermal short circuits
  - All panel joints/corners employ triple seal process to ensure full vapor barrier seal
- Interior and exterior surface is embossed 26GA galvanized steel
  - Interior polyester coating in igloo white
  - Exterior silicone modified polyester coating in winter white
- 5" R-41 standard panel thickness
- 6" R-49 optional roof panel thickness
- Optional color matched panels available
- Optional exterior colors:



Winter White




Light Stone



Ash Gray

- Color Systems

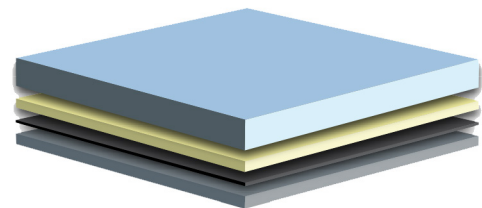

- 0.75 mil nominal Top Color Coat
- 0.25 mil nominal Primer
- Metal Substrate